



Features

- Surge protection increases reliability
- Handles analog, serial, and Ethernet sensors
- Easy to configure and wire sensors
- Able to cycle power for individual sensors
- Optimizes charging voltage according to temperature

Vaisala Power Management Unit PMU701 manages power and sensor communication within Vaisala Road Weather Station RWS200.

Centralized Power Management

PMU701 handles the specific power requirements of the sensors, ensuring that each sensor receives steady and suitable power at all times.

PMU701 is also responsible for charging the internal backup battery supply inside the RWS200 enclosure. In case an external DC power supply is used with the road weather station, the power is routed through PMU701.

In total, PMU701 provides one external DC input, two solar panel inputs, four inputs for analog sensor communications, and fourteen inputs for serial communication, eight of which can be Ethernet-based communication.

Surge Protection

All sensor communication lines and DC power lines route through PMU701 to provide surge protection between the station, the DC power supply, and the individual sensors attached to the weather station.

As the RWS200 weather station enclosure is typically mounted to a pole or a metal lattice tower, lightning strikes are a real danger for the weather station.

Proper power protection ensures that power disruptions are kept to a minimum, which increases the overall reliability of the system.

Power Control


Continuous and steady power is a luxury for a roadside station. Power Management Unit PMU701 meets the challenges posed by power interruptions and surges caused by, for example, lightning. PMU701 provides surge protection and power to the sensors, including heating power when needed.

Simplified Configuration

PMU701 is designed for simplified configuration and wiring during initial setup or when adding new sensors. Grounding each sensor cable shield is simple and easy, and a quick reference card is provided to ensure that each sensor is connected correctly; once again, to add system reliability.

Simplified Maintenance

PMU701 has the ability to control and cycle the power of each sensor remotely, making it possible to perform some technical services remotely, such as powering down and restarting individual sensors.

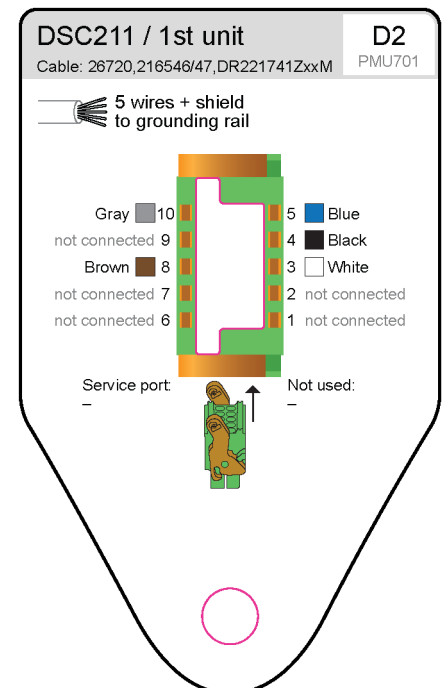

Quick Reference Card for Sensor Wiring

Technical Data

Operating Environment

Operating temperature	-40 ... +60 °C (-40 ... +140 °F)
Storage temperature	-60 ... +80 °C (-580 ... +176 °F)
Operating humidity	5 ... 95 %RH, non-condensing

Compliance

Vibration	IEC 60068-2-6
Rough handling	IEC 60068-2-31
Shock	IEC 60068-2-27
Dry heat	IEC 60068-2-2
Damp heat	IEC 60068-2-78
EMC (industrial environment)	EN/IEC 61326-1
Conducted emissions	CISPR22/EN 55022/Class B
Radiated emissions	CISPR22/EN 55022/Class B
Electrical safety	EN/UL/IEC 60950-1/-22

Inputs and Outputs

Operating voltage	24 VDC (10 ... 32 VDC maximum)
Solar panel input (requires PMP701)	10 ... 32 VDC
External DC power (requires PMP701)	12 ... 28 VDC (max. range 10 ... 32 VDC)
Output power	12 V at 3 A and 24 V at 7 A
Maximum charging current	4 A / total
Nominal charging voltage	13.5 V at +25 °C (+77 °F)

Connectors

DC INPUT	23 ... 32 V at 10 A Phoenix Contact MVSTBR 2,5HC/2-ST-5.08
-----------------	---

BATTERY	2 separately controlled 12 V lead-acid batteries Temperature compensation Deep discharge protection Phoenix Contact MVSTBR 2,5HC/2-ST-5.08
----------------	---

SERVICE	RS-232 Phoenix Contact DFMC 1,5/5-ST-3,5-LR
----------------	--

POWER OUT C	12 V out at 1.4 A, 24 V out at 2.8 A Phoenix Contact DFMC 1,5/5-ST-3,5-LR
--------------------	--

ETHERNET	10/100 Mbps 2 × RJ45
-----------------	-------------------------

DMU	Serial and I/O Molex 90130-3250
------------	------------------------------------

TELECOM	RS-232/RS-485, DC output Phoenix Contact DFMC 1,5/10-ST-3,5-LR
----------------	---

Mechanical Specifications

Dimensions (H × W × D)	126 × 224 × 142 mm (4.96 × 8.82 × 5.59 in)
------------------------	---

Weight	1.4 kg (3.1 lb)
--------	-----------------

Materials

Screws, washers, DIN rail locking piece	Stainless steel AISI 316
Grounding rail clamps	Stainless steel AISI 630
Frame profile	Aluminum EN AW-6060 T6
Cooling plate	Aluminum EN AW-6082 T6
Side plates	Plastic PC/ABS
Grounding rail	Copper (Cu)

Available Plug-in Module Slots

PMP701	Maximum 1 pcs
PMA701	Maximum 2 pcs
PMS701	Maximum 7 pcs ¹⁾
PME701	Maximum 4 pcs ¹⁾

¹⁾ SERIAL/ETHERNET slots can house either PME701 or PMS701 plug-in modules.

External DC / Solar Panel Input Module PMP701 Specifications

Surge protection	IEC 61000-4-5: external DC input up to 6 kV (line to GND) / 6 kV (line to line)
------------------	---

Reverse voltage protection	Yes
----------------------------	-----

Solar panel input	2 pcs Maximum 10 ... 32 VDC at 4 A/port
-------------------	--

External DC input	1 pc Maximum 10 ... 32 VDC at 15 A
-------------------	---------------------------------------

Status LED	Green for each input
------------	----------------------

Analog Input/Output Module PMA701 Specifications

Surge protection	IEC 61000-4-5
------------------	---------------

Sensor power	12 V at maximum 2 A/port
--------------	--------------------------

Sensor power	24 V at maximum 3 A/port
--------------	--------------------------

Status LED	Green/Red
------------	-----------

Mechanical	Has red circuit board
------------	-----------------------

Digital I/O and Differential

Lines	2
-------	---

Frequency input signal	1 Hz ... 20 kHz, 2.5 ... 14 VDC, or 10 mV ... 15 VDC
------------------------	--

Excitation voltage signal	0 ... 12 VDC at 20 mA
---------------------------	-----------------------

Fast input high signal	0 ... 1.8 VDC, 12-bit ADC
------------------------	---------------------------

Fast input low signal	0 ... 1.8 VDC, 12-bit ADC
-----------------------	---------------------------

Single-ended/Differential measurement mode	Ground
--	--------

Connectors	Phoenix Contact DFMC 1,5/3-ST-3,5-LR
------------	--------------------------------------

Serial Input/Output Module PMS701 Specifications

Surge protection	IEC 61000-4-5
Sensor power	12 V at maximum 2 A/port
Sensor power	24 V at maximum 3 A/port
Heat output	24 V at maximum 5 A/port
Supports	RS-232 2-wire and 4-wire RS-485 Isolated 2-wire and 4-wire RS-485
Status LED	Green/Orange

Ethernet / Power over Ethernet Module PME701 Specifications

Surge protection	IEC 61000-4-5
Supported IEEE 802.3af PoE classes / module	1 × PoE class 0 (0.44 ... 12.94 W) device 1 × PoE class 3 (6.49 ... 12.95 W) device 2 × PoE class 1 (0.44 ... 3.84 W) device 2 × PoE class 2 (3.84 ... 6.49 W) device
Status LED	Ethernet link and speed built into connectors

PMU701 Plug-in Module Spare Parts

Spare Part	Order Code
External DC / Solar panel input module	PMP701SP
Analog input/output module with 10-pin cable connectors (2 pcs)	PMA701SP
Serial input/output module with 10-pin cable connectors (2 pcs)	PMS701SP
Ethernet / power over Ethernet module	PME701SP

PMU701 Spare Parts and Accessories

Spare Part or Accessory	Order Code
PMU701 unit including: <ul style="list-style-type: none"> Sensor data cable Phoenix Contact DFMC 1,5/10-ST-3,5-LR 20-pin cable connector (1 pc) 	PMU701SP
PMU701 accessories including: <ul style="list-style-type: none"> Torx screws M4×8 ISO14583 TX A4 (4 pcs) Torx screws M3×6 ISO14583 A4-60 (6 pcs) Cable shield grounding clamps SK 8 (10 pcs) (217844) Cable shield grounding clamps SK 14 (10 pcs) (237528) Hex-tapped spacers M4×55 FeZn Female/Male (2 pcs) Enclosure sensor grounding rail (DRW240852) PMU701 sensor grounding rail (DRW240399) 	PMU701ACC1SP
PMU701 accessories including: <ul style="list-style-type: none"> Cable shield grounding clamps SK 8 (10 pcs) Cable shield grounding clamps SK 14 (10 pcs) 	PMU701ACC2SP
PMU701 accessories including: <ul style="list-style-type: none"> Set of quick reference cards Cable ferrules 0.5 mm² / 10 mm (100 pcs) (237754) Phoenix Contact DFMC 1,5/1-ST-3,5-LR 2-pin cable connectors (4 pcs) Phoenix Contact DFMC 1,5/3-ST-3,5-LR 6-pin cable connectors (10 pcs) Phoenix Contact DFMC 1,5/4-ST-3,5-LR 8-pin cable connectors (10 pcs) Phoenix Contact DFMC 1,5/5-ST-3,5-LR 10-pin cable connectors (30 pcs) Phoenix Contact DFMC 1,5/8-ST-3,5-LR 16-pin cable connectors (10 pcs) Phoenix Contact DFMC 1,5/10-ST-3,5-LR 20-pin cable connectors (5 pcs) Phoenix Contact MVSTBR 2,5HC/2-ST-5.08 cable connectors (4 pcs) Narrow cover plates for empty slots (7 pcs) Wide cover plates for empty slots (3 pcs) 	PMU701ACC3SP

