
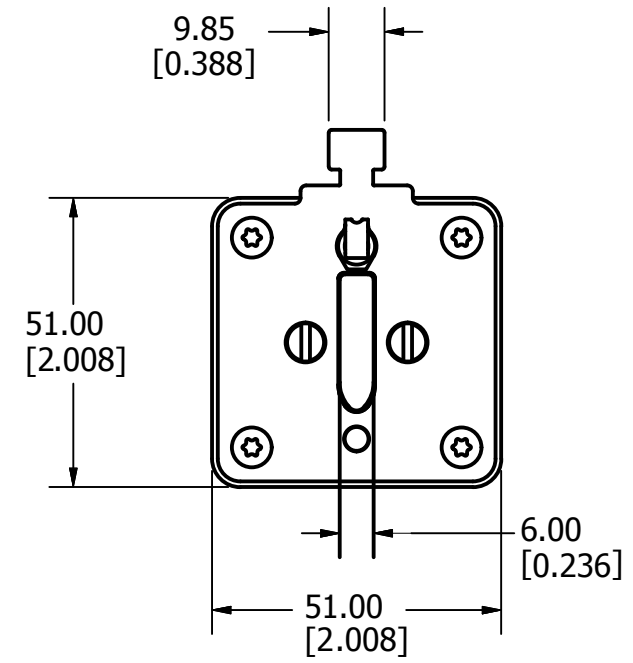


REVISION		
REV	DATE	DESCRIPTION
A	10/18/16	516546GCP - RELEASE MRY
B	6/6/17	517431ECP/D - REMOVE DATA SHEET REVISION MRY
C	2/16/18	518752ECP/B - ADD TOLERANCES MRY
D	10/20/20	522884ECP/C - UPDATE TO NEW CAP DESIGN MRY

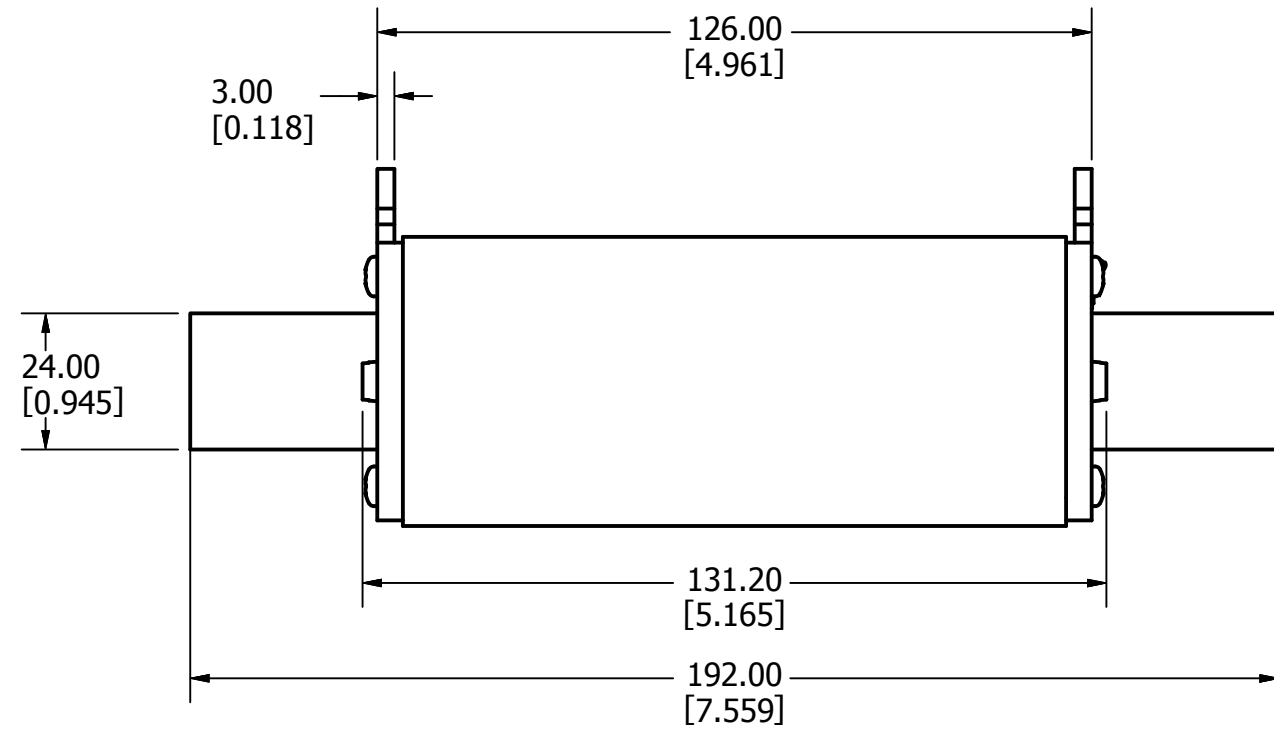

●	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.


B

MATL SPEC	FINISH		
DRW MYORK	DATE 10/17/2016	SCALE NTS	FINISH GOOD WT GRAMS/PIECE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION	
----------------------	--

TITLE	1500VDC PHOTOVOLTAIC FUSE OUTLINE
--------------	-----------------------------------

 Littelfuse CHICAGO, ILLINOIS 60631	REVISION D	DRWG NO. OL-SPNH000	SHEET 1 OF 1
--	----------------------	-------------------------------	--------------